


外形尺寸

外螺纹杆规格

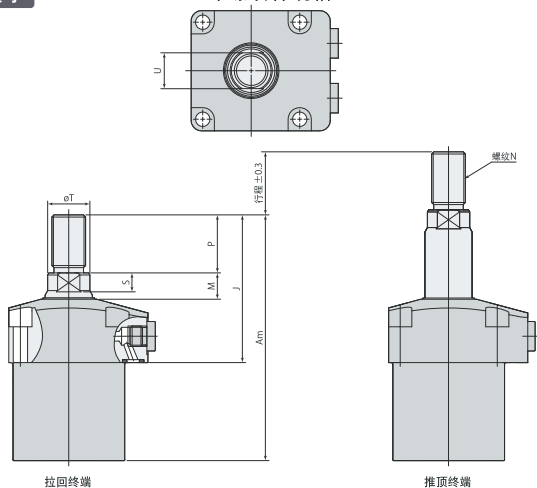

拉回终端

推顶终端

注：本页未记载的规格及尺寸，请参照内螺纹杆规格参数。
mm

型号	CNA02-□M	CNA04-□M	CNA06-□M	CNA10-□M	CNA16-□M	CNA25-□M
J	58	64.5	70	81	92	110.5
M	10.5	11.5	12.5	13.5	15.5	17
N	M12×1.25	M14×1.5	M16×1.5	M20×1.5	M24×1.5	M30×1.5
P	20	25	27.5	30	35	45
S (对边高度)	7	8	9	10	12	14
eT	14±0.2	16±0.2	20±0.2	23±0.2	28±0.2	33.5±0.3
U (对边宽)	12	14	17	19	24	30

行程 参数	10		15		20		30		40		50		60		70		80		90		100		110	
	Am(CNA02)	86	86	101	101	121	121	141	141	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Am(CNA04)	95.5	95.5	110.5	110.5	130.5	130.5	150.5	150.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Am(CNA06)	101.5	101.5	116.5	116.5	136.5	136.5	156.5	156.5	176.5	176.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Am(CNA10)	118.5	-	118.5	138.5	138.5	158.5	158.5	178.5	178.5	198.5	198.5	-	-	-	-	-	-	-	-	-	-	-	-	-
Am(CNA16)	131	-	131	151	151	171	171	191	191	211	211	-	-	-	-	-	-	-	-	-	-	-	-	-
Am(CNA25)	-	-	160.5	160.5	180.5	180.5	200.5	200.5	220.5	220.56	240.5	240.5	-	-	-	-	-	-	-	-	-	-	-	-



型號表示

CMC ①-②③

①尺寸


②行程

③主杆頂端形狀

CMC	01	5 (CMC01~10)	無記號：螺絲型 (標準) R : 球型
	03		
	04		
	06		
	10		
10	15	20 (CMC20)	
20			

型號	CMC 01				CMC 03				CMC 04				CMC 06				CMC 10				CMC 20			
行程 (mm)	5	10	15	20	5	10	15	20	5	10	15	20	5	10	15	20	5	10	15	20	5	10	15	20
油缸 3.5MPa	0.16kN				0.4 kN				0.5 kN				0.9 kN				1.4 kN				2.8 kN			
油缸 7.0MPa	0.34kN				0.8kN				1.1kN				1.9kN				2.9kN				5.6kN			
油缸 25.0MPa	1.24kN				2.8kN				3.8kN				6.4kN				9.9kN				20.0kN			
空壓面積	0.50cm ²				1.13cm ²				1.54cm ²				2.55cm ²				3.94cm ²				8.04cm ²			
最大流量	0.15cm ³ /sec				5.7cm ³ /sec				7.7cm ³ /sec				12.7cm ³ /sec				19.7cm ³ /sec				40.2cm ³ /sec			
油缸容積 (cm ³)	0.3	0.5	0.8	0.6	1.1	1.7	0.8	1.5	2.3	1.3	2.5	3.8	2.0	3.9	5.9	8.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
印位彈簧力	13N-19N				28N-42N				38N-59N				62N-100N				97N-160N				200N-310N			
質量 (g)	90	60	80	70	100	130	90	120	150	160	210	280	240	300	350	630	780	780	780	780	780	780	780	780
使用壓力範圍	1.0-25.0 MPa																							
保固耐壓	37.5 MPa																							
使用環境溫度	0-70 °C																							

外形尺寸

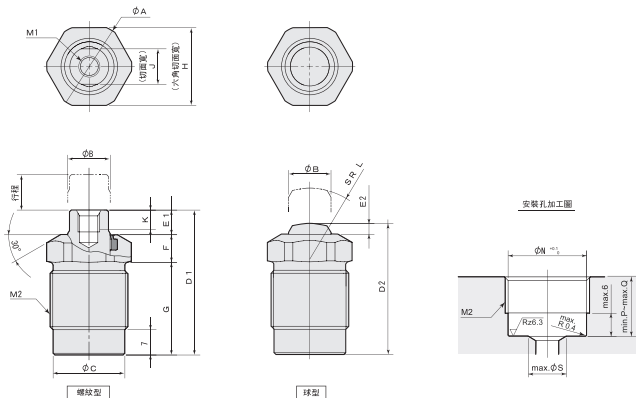

型號	CMC 01				CMC 03				CMC 04				CMC 06				CMC 10				CMC 20			
	5	10	15	5	10	15	5	10	15	5	10	15	5	10	15	5	10	15	5	10	15	20		
行程	5	10	15	5	10	15	5	10	15	5	10	15	5	10	15	5	10	15	5	10	15	20		
A	15.5			24			26			33			40			50								
B	8			12			14			18			22.4			34.3								
C	14.3			20.3			23.3			28.3			34.3			46								
D1	31	41	50	31	41	51.5	36	47	58	40.5	51.5	62.5	44.5	54.5	66.5	67.5	80.5	92						
D2	27	37	46	27	37	47.5	31	42	53	34	45	56	36.5	46.5	58.5	57	70	81.5						
E1	5.5			7			8.5			12			16											
E2	1.5			3			3.5			4			5.5											
F	6			8			9			10.5			14											
G	19.5	29.5	38.5	16	26	36.5	18.5	28.5	40.5	20	31	42	20	30	42	37.5	50.5	62						
H	14			22			24			30			36			46								
J	7			10			12			14			19			27								
K	4.5			5.5			6.5			7.5			9.5			12.5								
L	16			20			25			32			40			50								
M1	M3x 螺絲			M6x 螺絲			M8x 螺絲			M8x 螺絲			M12x 螺絲			M12x 螺絲								
M2	M16x1.5			M22x1.5			M28x1.5			M36x1.5			M56x1.5			M80x1.5								
N	14.5			20.5			23.5			28.5			34.5			46.5								
P	12			13			14			15			17			20								
Q	19	29	38	15.5	25.5	36	18	29	40	19.5	30.5	41.5	19.5	29.5	41.5	37	50	61.5						
R	5			8			10			14			19			26								
標準行程	AS568-012(90)				AS568-015(90)				AS568-019(90)				AS568-022(90)				AS568-126(90)							
額定值與延	10 N·m				30 N·m				40 N·m				60 N·m				110 N·m				270 N·m			



型號表示

CMD ①-②

①尺寸

②行程

CMD	①尺寸				②行程			
	02	04	06	10	5	10	10	20
	04	06	10	20	5	10	10	20
	10	20	10	20	10	20	10	20
	20	10	10	20	10	20	10	20
	40	10	10	20	10	20	10	20

型號	CMD 02	CMD 04	CMD 06	CMD 10	CMD 20	CMD 40
行程(mm)	5 10	5 10	10 20	10 20	10 20	10 20
油缸能力	油壓每3.5MPa時	0.3kN	0.5kN	0.8kN	1.3kN	2.2kN
	油壓每7.0MPa時	0.6kN	1.0kN	1.6kN	2.6kN	4.4kN
	油壓每10.5MPa時	2.1kN	3.4kN	5.7kN	9.4kN	1.6kN
	油壓每15.0MPa時	2.9kN	4.8kN	8.0kN	13.2kN	22.4kN
受壓面積	0.84cm ²	1.37cm ²	22.9cm ²	3.76cm ²	6.40cm ²	11.07cm ²
最大流量	4.2cm ³ /sec	6.9cm ³ /sec	11.4cm ³ /sec	18.8cm ³ /sec	32.0cm ³ /sec	55.4cm ³ /sec
油缸管體(cm ³)	0.5 0.9	0.7 1.4	2.3 4.6	3.8 7.5	6.4 12.8	11.1 22.2
單位彈簧力	30N-56N	43N-77N	65N-120N	100N-193N	170N-267N	283N-470N
質量(kg)	0.10 0.12	0.12 0.15	0.23 0.30	0.35 0.46	0.69 0.89	1.10 1.40

使用油壓範圍: 11.5-35 MPa 保證行程: 52.5MPa 使用環境溫度: 0-70°C